



How to Replace a Lighted On/Off Rocker Switch

000228 Lighted Rocker Switch

Tools Needed

- Flathead Screwdriver or 1/4" Nut Driver
- 1/2" Wrench, Nut Driver, or Socket
- Wire Cutters
- Wire Strippers
- Electrical Tape



Questions?
Give us a call at 1-800-536-9495
or email support@ironaway.com

1



Turn off power at electrical entrance

Please disconnect all power to the unit at service entrance BEFORE attempting to service or rewire the unit.

OP

Optional

Completely remove electrical raceway

For ease of installation, completely remove the electrical raceway by disconnecting the electrical wires. Disconnect the ground wire from the unit, then the main electrical supply wire. If your unit has a spotlight, you may also disconnect this wire.

PLEASE NOTE: Carefully examine the wiring as you will need to reconnect these prior to re-installing your electrical raceway.


2



Unscrew electrical raceway

With electricity shut off at service entrance, begin removing electrical raceway from unit. Remove screws at the top and bottom of raceway with a flathead screwdriver. Gently pull raceway out of unit, being careful of wires that are still connected.

3a

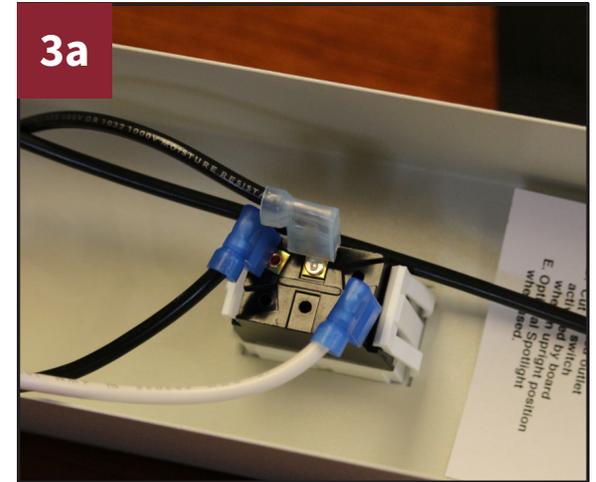

Disconnect old switch


Turning raceway over, locate the three terminal connectors on back of switch. Remove all three connectors.

Please note: Removing connectors requires some gentle pulling force.




Remove switch

Remove switch by depressing the locking springs on both sides of old switch and popping switch out through rectangular hole.

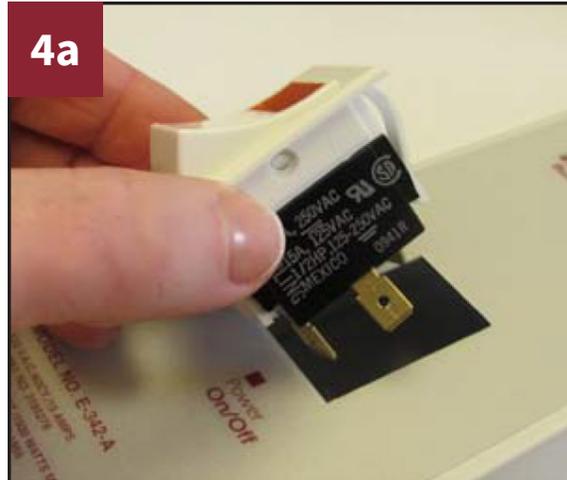

Install new switch

Install new switch by placing bottom of switch through the front of the electrical raceway into the rectangular hole. Make sure amber part of switch is pointing towards the top of the raceway.

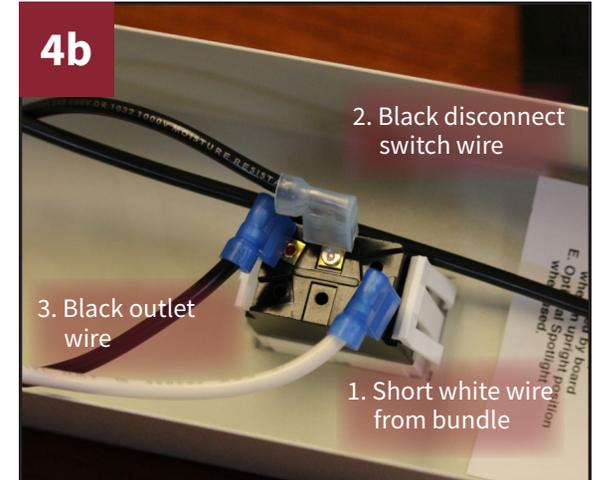

Replace connection wires

Return connectors to terminal on back of new switch: 1. Short white wire coming from bundle to top position closest to top of raceway; 2. Black wire from disconnect switch to middle position; 3. Black outlet wire to bottom position.



Re-install raceway

Being careful not to pinch any wires, replace the raceway to the unit. Replace top and bottom screws. After replacing raceway, restore power to unit.

If you disconnected the raceway from the ironing center, please re-connect before returning raceway to unit.

Installation Complete!

Questions?
Give us a call at 1-800-536-9495
or email support@ironaway.com

