



How to Replace an Electrical Outlet

000230 White Outlet

**For models AE-46, AE-42,
E-46, E-42, and UD-42**

Tools Needed

- Flathead Screwdriver or 1/4" Nut Driver
- Philips Screwdriver



Questions?
Give us a call at 1-800-536-9495
or email support@ironaway.com




1 Turn off power at electrical entrance

Please disconnect all power to the unit at service entrance BEFORE attempting to service or rewire the unit.



2 Unscrew electrical raceway

With electricity shut off at service entrance, begin removing electrical raceway from unit. Remove screws at the top and bottom of raceway with a flathead screwdriver. Gently pull raceway out of unit, being careful of wires that are still connected.

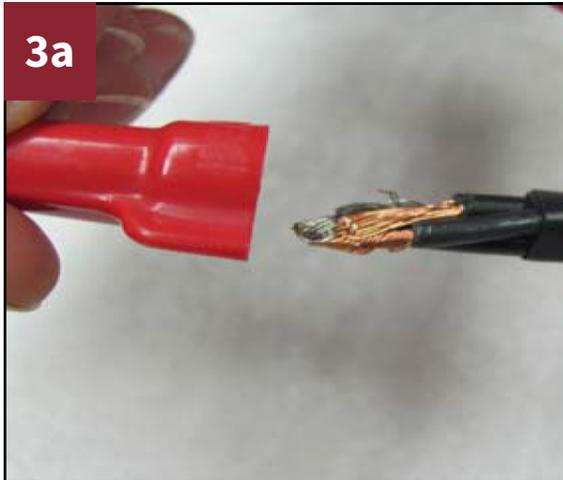

3a Disconnecting wires

Locate the two bundles of wires (black, white) held together by wire nuts. Then, unscrew the wire nuts from the bundles in a counter-clockwise direction. Remove the long black wire from the black bundle that connects to outlet.



3b Disconnecting wires

Next, remove the long white wire from white bundle that connects to outlet.




4

ALL: Disconnect green ground wire
Unscrew the green screw on unit to release green ground wire from outlet.



5

Pry off outlet clips
The outlet is held in place by springs on each side. With your flathead screwdriver, pry away each black spring from the outlet. The springs should break off from the outlet. If they do not, use needle-nose pliers to remove the springs from each side.

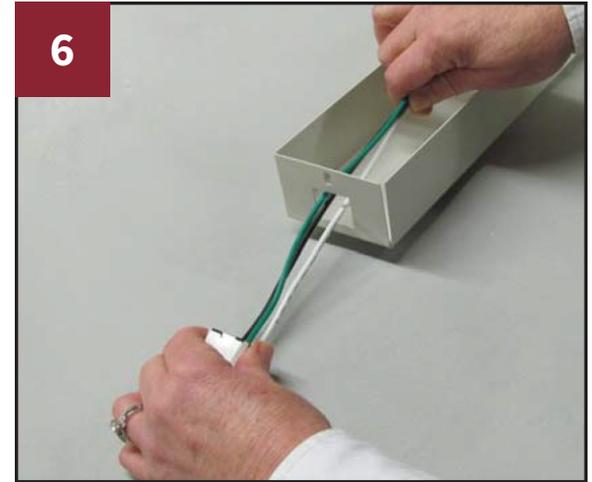

6

Remove outlet
Remove old outlet by pulling out and sliding wires through hole.




7

Install new outlet
Slide wires from new outlet through hole in raceway, pushing bottom of outlet until it snaps into place.



8a

Reconnecting wires
Place the long white wire from the outlet into the white bundle of wires and replace the wire nut removed in step three.

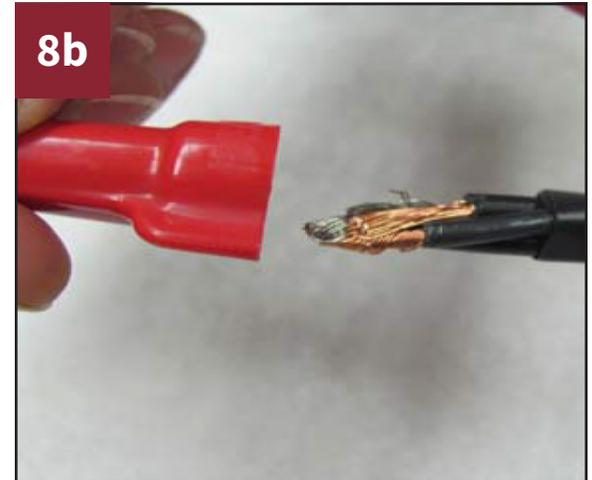

8b

Reconnecting wires
Place the long black wire from the outlet into the black wire bundle and replace the wire nut removed in step three.



9

Installation Complete!

ALL: Re-install raceway

Return raceway to unit, screwing top and bottom screws to hold in place. Restore power to ironing center.

